


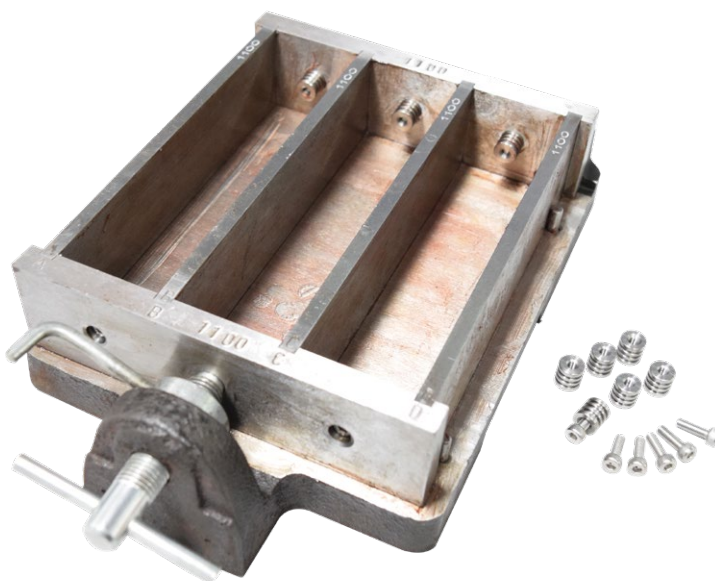

SHRINKAGE MOULD (40.1 X 40 X 160mm)

Standard: EN 12617-4, EN 12808-4

Mortar Shrinkage

Use to cast mortar prisms with embedded plugs for determination of linear shrinkage with dimensions as per standard requirement. Made from special steel with minimum surface hardness of HV200.

Set Consists Of :

Model Number	Parts Description	Qty
NL 3039 X / 001	Three Gang Prism Mould	1no.

Technical Specifications :


Model Number	NL 3039 X / 001
Material	Carbon Steel & Cast Iron
Specimen Dimension	40 (W) x 160 (L) x 40 (H) mm
Mould Dimension	167 (W) x 207 (L) x 60 (H) mm
Weight	6.2 kg

Optional Accessories :

Model Number	Accessories Description
NL 3039 X / 001 – A001	Stainless Steel Recessed Stud c/w Fixing Screw (pack of 12pcs) EN 12617-4
NL 3039 X / 001 – A002	Insert for 10x40x160 mm Specimen (pack of 12pcs) EN 12808-4
NL 3039 X / 001 – A003	Spacer Piece Dimension 15x40x160 mm (pack of 6pcs) EN 12808-4
NL 3024 X / 002A	Length Comparator Apparatus
NL 3024 X / 001 – A006	Reference Rod 160 mm (Both end recessed c/w 2nos St. Steel Balls)



Inserts & Contact Points

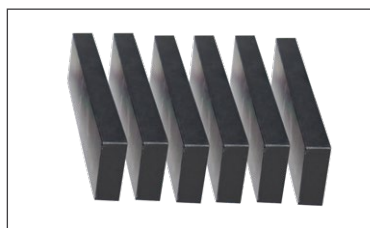

Spacers